

DS-2CD6362F-I(V)(S) 6MP Fisheye Network Camera



DS-2CD6362F-I(V)(S) is designed to single-handedly capture images from every corner of a particular location and eliminate blind spots. It features a progressive scan CMOS sensor to provide high-resolution images of up to 3072×2048 , and a fisheye lens for a 360° panoramic or multiple de-warped views. Furthermore, IR functionality provides up to 15m IR distance of visibility under low or even zero-light conditions.

It is a great choice for detailed coverage of wide, open areas like airports, shopping malls, parking lots, retail stores, offices, restaurants, classrooms, and more.

Multiple Display Modes

The 6MP IR Fisheye Network Camera supports several viewing modes, including the 360° view (in 3 megapixel resolution, respectively), a horizontal panoramic view, PTZ quad view modes. Customers can also utilize this smooth PTZ function to easily pan, tilt and zoom, on any region of interest (ROI).

- 1/1.8" Progressive Scan CMOS
- 6 megapixel image sensor
- Up to 3072×2408 resolution, real-time streaming
- Multiple viewing modes
- Line crossing and intrusion detection
- Ceiling, wall or table mount modes
- Up to 15m IR range
- 360° view angle
- Built-in microphone & speaker
- Audio/Alarm IO/ RS485(-S model)
- IP66(-V model)
- IK10 vandal proof(-V model)




DS-2CD6362F-I(V)(S) 6MP Fisheye Network Camera



Specification

Camera	
Image Sensor	1/1.8" Progressive Scan CMOS
Min. Illumination	0.05 Lux @ (F1.2, AGC ON), 0.3 Lux @ (F2.8, AGC ON), 0 Lux with IR
Shutter Speed	1/25(1/30)s ~ 1/100,000s
Lens	1.27mm, F2.8; Angle of view: 180°(wall mount), 360°(ceiling mount)
Lens Mount	M12
Day & Night	ICR
Compression Standard	
Video Compression	H.264 / MJPEG
H.264 Type	Baseline Profile / Main Profile / High Profile
Video Bit Rate	32 Kbps – 16 Mbps
Audio Compression(-S)	G.711/G.726/MP2L2/
Audio Bit Rate	64Kbps(G.711) / 16Kbps(G.726) / 64Kbps(MP2L2)
Image	
Max. Resolution	3072 × 2048
Live Mode	Mode1 1×Fisheye + 1×Panorama + 3×PTZ
	Mode2 1×Fisheye or 4×PTZ
	Mode3 1×Fisheye(main stream) + 1×Fisheye(sub stream) + 3×PTZ
	Mode4 1×Panorama(main stream) + 1×Panorama(sub stream)
Frame Rate	Mode1 50Hz: 1×fisheye (1280×1280, 12.5fps), 1×panoramic (2048×1536, 12.5fps), 3×PTZ (1024×768, 12.5fps) 60Hz: 1×fisheye (1280×1280, 15fps), 1×panoramic (2048×1536, 15fps), 3×PTZ (1024×768, 15fps)
	Mode2 50Hz: 1×fisheye (3072×2048/2048×2048, 25fps) or 4×PTZ (1024×768, 25fps) 60Hz: 1×fisheye (3072×2048, 25fps/2048×2048, 30fps) or 4×PTZ (1024×768, 30fps)
	Mode3 50Hz: 1×Fisheye(2048×2048, 12.5fps; 1024×1024, 25fps) + 1×Fisheye(720×720, 12.5fps) + 3×PTZ(1024×768, 12.5fps) 60Hz: 1×Fisheye(2048×2048, 15fps; 1024×1024, 25fps) + 1×Fisheye(720×720, 15fps) + 3×PTZ(1024×768, 15fps)
	Mode4 50Hz: 1×Panorama(2048×1536(ceiling or table)/1920×1080(ceiling or table) / 2048×1536 (wall mount)/2048×768(wall mount), 25fps) + 1×Panorama(704×576, 25fps) 60Hz: 1×Panorama(2048×1536(ceiling or table)/1920×1080(ceiling or table)/ 2048×1536(wall mount)/2048×768(wall mount), 30fps) + 1×Panorama(704×576, 30fps)
Digital Noise Reduction	3D DNR
Image Setting	Saturation, Brightness, Contrast, Hue, Sharpness, AGC, White Balance
Wide Dynamic Range	Digital WDR
Day/Night Switch	Auto/Schedule/Alarm Trigger
ROI	Up to 4 fixed areas in each stream
Intelligent	
Heat Map	Recording the motion of foot traffic over a period of time and displays temporal density and spatial statistics in different colors.

Dimensions

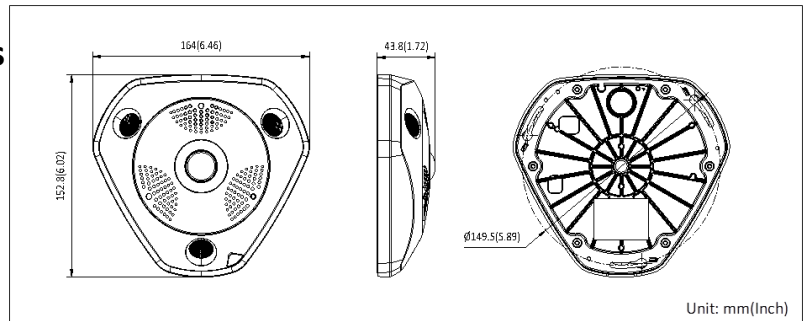

Network	
Network Storage	NAS (Support NFS,SMB/CIFS)
Alarm Trigger	Line crossing detection, Intrusion detection, Motion detection, Dynamic analysis, Tampering alarm, Network disconnect, IP address conflict, Storage exception
Protocols	TCP/IP,ICMP,HTTP,HTTPS,FTP,DHCP,DNS,DDNS,RTP,RTSP,RTCP ONVIF(PROFILE S,PROFILE G), PSIA, CGI, ISAPI
Security	User Authentication, Watermark, IP address filtering, Anonymous access
Interface	
Communication Interface	1 RJ45 10M/100M/1000M Ethernet interface; 1 RS485 interface(-S)
Audio Input	1 3.5mm audio interface, Mic in/Line in (-S); 1 built-in microphone by default, 24db
Audio Output	1 3.5mm audio output interface (-S); 1 built-in speaker by default, support echo cancellation
Alarm Input(-S)	1
Alarm Output(-S)	1
On-board storage	Built-in Micro SD/SDHC/SDXC slot, up to 128 GB
General	
Operating Conditions	Indo Indoor: -10 °C – 50 °C (14 °F – 122 °F) Outdoor: -30 °C – 60 °C (-22 °F – 140 °F) Humidity 95% or less (non-condensing)
Power Supply	12 VDC ± 10% / PoE (802.3af)
Power Consumption	Max. 12W
IR Range	15 meters
Impact Protection	-V: IEC60068-2-75Eh, 20J; EN50102, up to IK10
Ingress Protection level	-V: IP66
Dimensions	164x152.8x43.8mm(6.46"x6.02"x1.72")
Weight	1400g
Order Models	
DS-2CD6362F-I, DS-2CD6362F-IV, DS-2CD6362F-IS, DS-2CD6362F-IVS	

Accessories



DS-1280ZJ-DM25
Junction box



DS-1281ZJ-DM25
Inclined ceiling mount



DS-1273ZJ-DM25
Wall mount



DS-1271ZJ-DM25
Pendent mount